



SERIES

592

599



INDUSTRY LEADING
COMMERCIAL & INDUSTRIAL SOLUTIONS

Heavy-Duty Thermacore® Door System

SERIES 592/599



Installation and Service: Overhead Door Company of Southwestern Idaho

Standard Features At a Glance

Panel thickness	2" (51 mm)
R-value	17.50 (3.09 W/Msq)
U-value	.057 (.324 Msq/W)
Air infiltration:	
at 15 mph (24 kmph)	.08 cfm/sq. ft. (2.26 Lpm)
at 25 mph (40 kmph)	.08 cfm/sq. ft. (2.26 Lpm)
Thermal break	PVC
STC Rating	Class 26
Exterior steel	.015" (.38 mm)
Exterior surface	592: Ribbed, Textured 599: Flush, Textured
Standard springs	10,000 cycle
Maximum width	40'2" (12,243 mm)
Maximum height	32'1" (9,779 mm)
Exterior color	592: White, brown, tan, gray 599: White
Interior color	White
Limited Warranty	10-year delamination 1-year door 3-year/20,000 cycle door and operator system (material and workmanship)

Options

- Thermal glazing
- Wind load options
- Four-section pass door
- High-usage components
- 592 only: Kynar finish option available in white, brown, and beige (20-year limited warranty)
- Electric operator
- Chain hoist
- Posi-Tension drums
- Stop bottom fixture
- Bottom sensing edge
- Header and jamb seal
- Aluminum sash section available to 24'2" (7366 mm) wide
- Exhaust ports

The Most Thermally Efficient

With an R-value of 17.50 (3.09 W/Msq) a U-value of .057 (.324 Msq/W), and one of the best overall air infiltration ratings in the industry, the Thermacore® 592/599 Series is the most thermally efficient door system in its class that you can install. The 592/599 Series incorporates the Thermacore® steel-polyurethane-steel panel construction, which provides a thermal barrier to withstand harsh climates and demanding environmental requirements.

This 2" (51 mm) thick, heavy duty door is available in standard sizes up to 40'2" (12,243 mm) wide and 32'1" (9,779 mm) high to fit the broadest range of applications.

Built With the Best Technology in the Business.


The 592/599 Series is manufactured using Overhead Door Corporation's proprietary, computer-controlled fabrication process. This advanced technology ensures adherence to the industry's strictest product tolerances and results in an exceptionally well-built door for outstanding thermal efficiency and long-lasting performance.

Highly Engineered for High Thermal Efficiency.

The Thermacore® product line's unique manufacturing process provides a CFC-free, fully encapsulated, foamed-in place panel which maintains R-value performance year round – and year in and year out. Thermal breaks between internal and external skins, PVC thermal break and joint seal minimize air infiltration and provides one of the highest thermal efficiency ratings in the industry for specified applications.

Strong, Lightweight, Attractive and Durable.

Thermacore® 592/599 doors feature .015" (.38 mm) roll-formed, hot-dipped galvanized steel exterior panels. Wind load design available as an option. Two coats of baked-on, polyester paint on the ribbed textured surface of the 592 Series and flush textured surface of the 599 Series provide a handsome finish that will last for years. Our 10-year warranty against delamination means that we'll stand behind the quality of our doors at the outset and for the long haul.

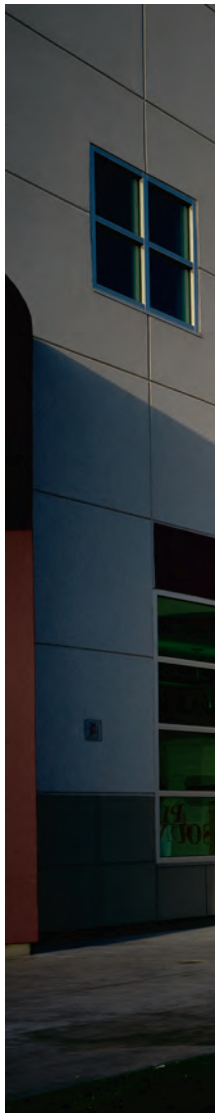



ient Door System We Offer.



Installation and Service: Overhead Door Company of Southwestern Idaho

Superior Field Serviceability.

Thermacore® has a special internal construction which allows hinges to be placed anywhere along the panel's length permitting customization on the job site — for fast and precise installation, repair or retrofit.

Many Options, Better Solutions.

The Thermacore® 592/599 is available in sizes up to 40'2" (12,243 mm) wide and 32'1" (9,779 mm) high. A full line of electric operators ensure precise and trouble-free motor operation in a variety of mounting options (side, center or trolley). Available options include aluminum sash section up to 24'2" (7366 mm) widths, thermal glazing, pedestrian pass door and jamb

weatherstripping. Optional high-usage components expands the versatility of the 592 and 599's to high-cycle conditions, with torsion springs in 25k, 50k, 75k or 100k cycles, a solid-steel shaft to reduce fatigue and deflection and a heavy-duty 3" (76 mm) steel track for added durability.

The Original, Innovative Choice for Unequalled Quality and Service

Overhead Door Corporation pioneered the upward-acting door industry, inventing the first upward-acting door in 1921 and the first electric door operator in 1926. Today, we continue to be the industry leader through the strength of our product innovation, superior craftsmanship and outstanding customer support, underscoring a legacy of quality, expertise and integrity. That's why design and construction professionals specify Overhead Door Corporation products more often than any other brand.

The Overhead Door Red Ribbon is a mark of quality that also reflects the pride we take in the people who support our products. Our family of over 400 Red Ribbon Distributors across the country not only share our name and logo, but also our commitment to excellence. Your Red Ribbon Distributor will work with you in a consultative role to ensure that product selections achieve your design and application requirements — in addition to offering expert installation, professional field service and ongoing maintenance. From project design and manufacturing to installation and service, the Overhead Door Red Ribbon is your guarantee of genuine quality and turnkey service excellence.

Together with our Red Ribbon Distributors, we offer comprehensive technical information and resource materials to support your project, including:

- Architectural Design Manual – a comprehensive guide to selecting, specifying and detailing all commercial and industrial Overhead Door products can be found at www.OverheadDoor.com/ADM/base.html
- Operation & Maintenance Manual – detailed product information, customized for your project, to ensure reliable, long-life door system operation
- Custom application and technical assistance through ordering plants' customer service and technical services respectively
- Visit our Architect's Corner at [www.OverheadDoor.com/architects corner](http://www.OverheadDoor.com/architects%20corner)



Advanced Rolling Steel Door
RapidSlat®



Thermacore® Sectional Doors



Rolling & Side Folding
Security Grilles & Closures



Rolling Service Doors



Commercial Operators

Today, Overhead Door Corporation – along with our Horton Automatics division, for automated pedestrian entrances – is recognized as the leading, single-source manufacturer of integrated door and operator systems for commercial, industrial and residential applications. With multiple manufacturing locations throughout the United States, a state-of-the-art TREQ (Testing, Reliability, Engineering, and Quality) Center for design and engineering, and a national network of authorized Red Ribbon Distributors, our capabilities are leading-edge and our field service and technical support second to none. Built best and backed best, Overhead Door is the industry's leading choice for quality that shows and lasts.

To talk with the Overhead Door Red Ribbon Distributor nearest you, call 1-800-929-DOOR.

Overhead Door Corporation



INDUSTRY LEADING
COMMERCIAL & INDUSTRIAL SOLUTIONS

The Overhead Door Corporation family of quality commercial and industrial products includes:



A part of Sanwa Holdings Corporation

©2012 Overhead Door Corporation. Overhead Door, Thermacore, RHX, RSX, Fire Sentinel, RapidSlat and the Ribbon logo are registered trademarks of and CDX is a trademark of Overhead Door Corporation. Knock & Lock is a registered trademark of Kenneth E. Nachreiner. All other trademarks are property of their rightful owners. Consistent with our policy of continuing product improvement, we reserve the right to change product specifications without notice or obligation. C900-094 1M 6/12 JAR